

**PNEUMATIC COUPLINGS**  
PNEUMATISCHE KUPPLUNGEN

**SERIE 051B**

DOUBLE SHUT OFF **BEIDSEITIG ABSPERRBAR**



**Interchangeability - Kompatibilität**  
RECTUS 52KB, WALTHER SP 006

**Temperature Range - Temperaturbereich**  
-20 °C +100 °C (-4 °F +212 °F)

**Working Pressure - Betriebsdruck**  
0 - 35 bar (0 - 508 PSI)

**Flow capacity - Nennweite**  
NW - 6

**Option - Optionen**

- K - Chrome plated - verchromt
- KN - Chemical nickel Plated - Chemisch vernickelt
- S - Stainless Steel - Edelstahl (S3 AISI 303, S6 AISI 316TI)
- V - Viton Seal - Viton Dichtung

For optional orders please add the symbol of your option end of the order no.  
Bei Optionsbestellungen Kennbuchstabe bitte hinzufügen (Beispiel: 051 EGB 13-K-V)

**Material - Material**

**Body - Kupplung**

Coupler Body - Kupplungsgrundkörper : Steel Nickel Plated - Stahl vernickelt

Back Part - Hinterteil : Brass Nickel Plated - Messing Vernickelt

Sleeve - Hülse : Steel Nickel Plated - Stahl vernickelt

Valve - Ventil : Brass - Messing  
Springs - Federn : Stainless Steel - Edelstahl

Sprenging : Stainless Steel - Edelstahl

Balls - Kugeln : Stainless Steel - Edelstahl AISI 420

Seals - Dichtungen : Nitrile (Ni) - NBR (Ni)

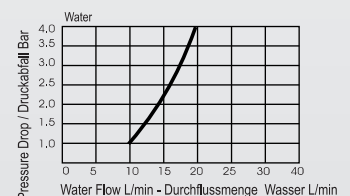

**Plug - Nippel**







Plug Profile - Stecker Profil : Steel Nickel Plated - Stahl vernickelt

Back Body - Hinterteil : Brass Nickel Plated - Messing Vernickelt

Valve - Ventil : Brass - Messing  
Springs - Federn : Stainless Steel - Edelstahl

Seals - Dichtungen : Nitrile (Ni) - NBR (Ni)



Couplers and Plugs Kupplungen und Nippel	Connection Anschlüsse	Order No Bestellnr.	SW	L	ØD
 Male Thread Coupling Kupplung mit Aussengewinde	BSP 1/4"	051 EGB 13	21	60,7	22
	BSP 3/8"	051 EGB 17	21	60,7	22
	BSP 1/2"	051 EGB 21	22	63,7	22
 Female Thread Coupling Kupplung mit Innengewinde	BSP 1/4"	051 DGB 13	21	62,7	22
	BSP 3/8"	051 DGB 17	21	62,7	22
	BSP 1/2"	051 DGB 21	24	63,7	22
 Standard Hose Barb Coupling Kupplung mit Schlauchtülle	6 mm - 1/4"	051 HGB 06	21	75	22
	9 mm - 5/14"	051 HGB 09	21	75	22
	11 mm - 7/16"	051 HGB 11	21	75	22
	13 mm - 1/2"	051 HGB 13	21	75	22
 Standard Hose Barb Plug Nippel mit Schlauchtülle	6 mm - 1/4"	051 HUB 06	21	58	
	9 mm - 5/14"	051 HUB 09	21	58	
	11 mm - 7/16"	051 HUB 11	21	58	
	13 mm - 1/2"	051 HUB 13	21	58	
 Male Threaded Plug Nippel mit Aussengewinde	BSP 1/8"	051 EUB 10	21	43	
	BSP 1/4"	051 EUB 13	21	44	
	BSP 3/8"	051 EUB 17	21	44	
 Female Thread Plug Nippel mit Innengewinde	BSP 1/8"	051 DUB 10	21	42	
	BSP 1/4"	051 DUB 13	21	44	
	BSP 3/8"	051 DUB 17	21	44	